


### Primax

Synonymous with function and performance, enter the Primax, the new era of high intensity illumination in LED. With its high flux output and high luminous intensity, Primax transcends today LED lightings technology and how we perceive it. The small package outline (3.7 x 3.5 x 0.8 mm) and high intensity make it an ideal choice for backlighting, signage, exterior automotive lighting and decorative lighting.



### Features:

- > Super high brightness surface mount LED
- > 120° viewing angle.
- > Compact package outline (LxW) of 3.7 x 3.5 mm.
- > Ultra low height profile - 0.8mm.
- > Low thermal resistance.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.

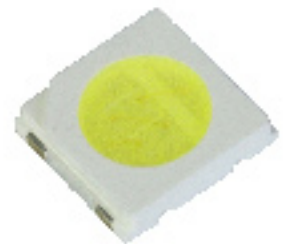

### Applications:

- > General lighting.

**Optical Characteristics at Tj=25°C**

Part Ordering Number	Color	Viewing Angle°	CRI Typ.	Luminous Flux @ 175mA (lm)		
				Min.	Typ.	Max.
MBWW-FSC-9U8V-1	White	120	84	106.5	121.4	138.4

NOTE

1. Luminous intensity is measured with an accuracy of ± 11%.
2. Wavelength binning is carried for all units as per the wavelength-binning table. Only one wavelength group is allowed for each reel.
3. High color rendering index (CRI). Minimum CRI of 80.

**Electrical Characteristics at Tj=25°C**

Part Number	Vf @ If = 175 mA			Vr @ Ir = 10uA
	Min. (V)	Typ. (V)	Max. (V)	Min. (V)
MBWW-FSC	6.2	6.6	7.4	5

Forward Voltages are tested using a current pulse of 1 ms and has an accuracy of ± 0.1 V.


**Absolute Maximum Ratings**

	Maximum Value	Unit
DC forward current	180	mA
Peak pulse current	250	mA
Reverse voltage	5	V
ESD threshold (HBM)	1000	V
LED junction temperature	150	°C
Operating temperature	-40 ... +125	°C
Storage temperature	-40 ... +125	°C
Thermal resistance		
- Junction / ambient, Rth JA	90	K/W
- Junction / solder point, Rth JS	18	K/W
(Mounted on dual sided FR4 in house PCB, total Cu area >900mm <sup>2</sup> )		

**Characteristics**

	Symbol	Part Number	Value	Unit
Temperature coefficient of $V_F$ (typ) $I_F = 175\text{mA}; 0\text{ }^\circ\text{C} \leq T \leq 100\text{ }^\circ\text{C}$	$TC_V$	MBWW-FSC	-7.0	mV / K
Temperature coefficient of $I_V$ (typ) $I_F = 175\text{mA}; 0\text{ }^\circ\text{C} \leq T \leq 100\text{ }^\circ\text{C}$	$TC_{IV}$	MBWW-FSC	-0.19	% / K
Temperature coefficient of $C_x$ (typ) $I_F = 175\text{mA}; 0\text{ }^\circ\text{C} \leq T \leq 100\text{ }^\circ\text{C}$	$TC_{Cx}$	MBWW-FSC	-0.00007	/ $^\circ\text{C}$
Temperature coefficient of $C_y$ (typ) $I_F = 175\text{mA}; 0\text{ }^\circ\text{C} \leq T \leq 100\text{ }^\circ\text{C}$	$TC_{Cy}$	MBWW-FSC	-0.00014	/ $^\circ\text{C}$

**MBWW-FSC, White Color Grouping**

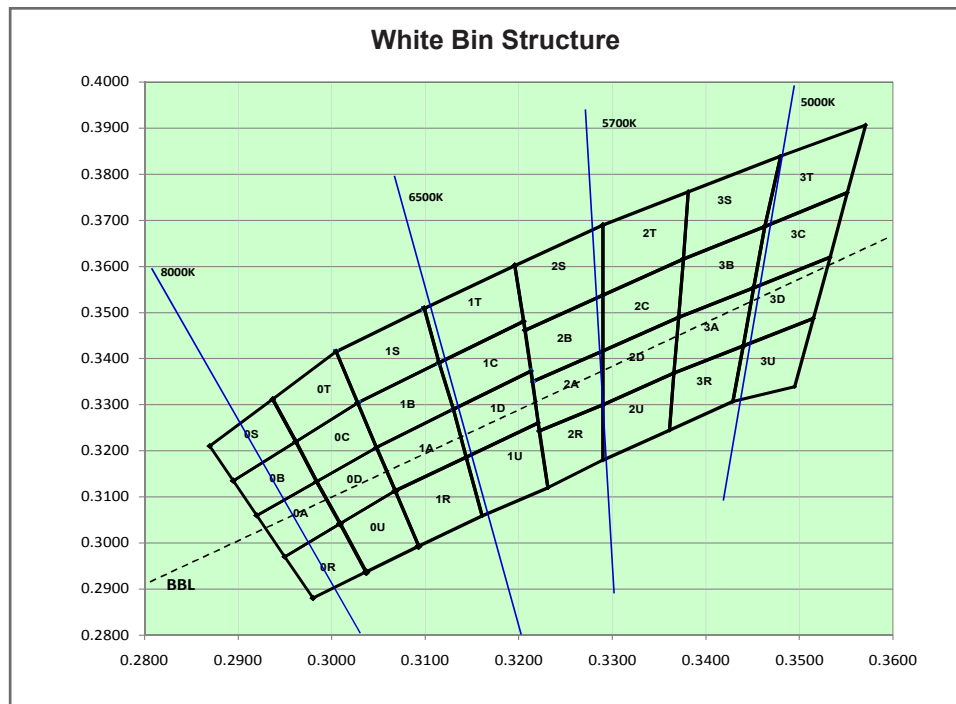

Chromaticity coordinate groups are measured with an accuracy of  $\pm 0.01$ .

Bin		1	2	3	4
0A	Cx	0.2950	0.2920	0.2984	0.3009
	Cy	0.2970	0.3060	0.3133	0.3042
0R	Cx	0.2980	0.2950	0.3009	0.3037
	Cy	0.2880	0.2970	0.3042	0.2937
1A	Cx	0.3048	0.3130	0.3144	0.3068
	Cy	0.3207	0.3290	0.3186	0.3113
1R	Cx	0.3068	0.3144	0.3161	0.3093
	Cy	0.3113	0.3186	0.3059	0.2993
2A	Cx	0.3215	0.3290	0.3290	0.3222
	Cy	0.3350	0.3417	0.3300	0.3243
2R	Cx	0.3222	0.3290	0.3290	0.3231
	Cy	0.3243	0.3300	0.3180	0.3120
3A	Cx	0.3371	0.3451	0.3440	0.3366
	Cy	0.3490	0.3554	0.3427	0.3369
3R	Cx	0.3366	0.3440	0.3429	0.3361
	Cy	0.3369	0.3428	0.3307	0.3245
0B	Cx	0.2920	0.2895	0.2962	0.2984
	Cy	0.3060	0.3135	0.3220	0.3133
0S	Cx	0.2895	0.2870	0.2937	0.2962
	Cy	0.3135	0.3210	0.3312	0.3220
1B	Cx	0.3028	0.3115	0.3130	0.3048
	Cy	0.3304	0.3391	0.3290	0.3207
1S	Cx	0.3005	0.3099	0.3115	0.3028
	Cy	0.3415	0.3509	0.3391	0.3304

Bin		1	2	3	4
2B	Cx	0.3207	0.3290	0.3290	0.3215
	Cy	0.3462	0.3538	0.3417	0.3350
2S	Cx	0.3196	0.3290	0.3290	0.3207
	Cy	0.3602	0.3690	0.3538	0.3462
3B	Cx	0.3376	0.3463	0.3451	0.3371
	Cy	0.3616	0.3687	0.3554	0.3490
3S	Cx	0.3381	0.3480	0.3463	0.3376
	Cy	0.3762	0.3840	0.3687	0.3616
0C	Cx	0.2984	0.2962	0.3028	0.3048
	Cy	0.3133	0.3220	0.3304	0.3207
0T	Cx	0.2962	0.2937	0.3005	0.3028
	Cy	0.3220	0.3312	0.3415	0.3304
1C	Cx	0.3115	0.3205	0.3213	0.3130
	Cy	0.3391	0.3481	0.3373	0.3290
1T	Cx	0.3099	0.3196	0.3205	0.3115
	Cy	0.3509	0.3602	0.3481	0.3391
2C	Cx	0.3290	0.3376	0.3371	0.3290
	Cy	0.3538	0.3616	0.3490	0.3417
2T	Cx	0.3290	0.3381	0.3376	0.3290
	Cy	0.3690	0.3762	0.3616	0.3538
3C	Cx	0.3463	0.3551	0.3533	0.3451
	Cy	0.3687	0.3760	0.3620	0.3554
3T	Cx	0.3480	0.3571	0.3551	0.3463
	Cy	0.3840	0.3907	0.3760	0.3687
0D	Cx	0.2984	0.3048	0.3068	0.3009
	Cy	0.3133	0.3207	0.3113	0.3042
0U	Cx	0.3037	0.3009	0.3068	0.3093
	Cy	0.2937	0.3042	0.3113	0.2993
1D	Cx	0.3130	0.3213	0.3221	0.3144
	Cy	0.3290	0.3373	0.3261	0.3186
1U	Cx	0.3144	0.3221	0.3231	0.3161
	Cy	0.3186	0.3261	0.3120	0.3059
2D	Cx	0.3290	0.3371	0.3366	0.3290
	Cy	0.3417	0.3490	0.3369	0.3300
2U	Cx	0.3290	0.3366	0.3361	0.3290
	Cy	0.3300	0.3369	0.3245	0.3180
3D	Cx	0.3451	0.3533	0.3515	0.3440
	Cy	0.3554	0.3620	0.3487	0.3427
3U	Cx	0.3440	0.3515	0.3495	0.3429
	Cy	0.3428	0.3487	0.3339	0.3307

Dominant color coordinate is measured with an accuracy of  $\pm 0.01$ .

**Luminous Intensity Group at Tj=25°C**

Brightness Group	Luminous Flux IV (lm)
9U	106.5 ... 113.6
6V	113.6 .. 121.4
7V	121.4 ... 129.2
8V	129.2 ... 138.4


Luminous intensity is measured with an accuracy of ± 11%.

**Vf Binning**


Vf Bin @ 175mA	Forward Voltage (V)
V1	6.20 ... 6.40
V2	6.40 ... 6.60
V3	6.60 ... 6.80
V4	6.80 ... 7.00
V5	7.00 ... 7.20
V6	7.20 ... 7.40

Forward voltage, Vf is measured with an accuracy of ± 0.1 V.


**Relative Intensity Vs Forward Current**

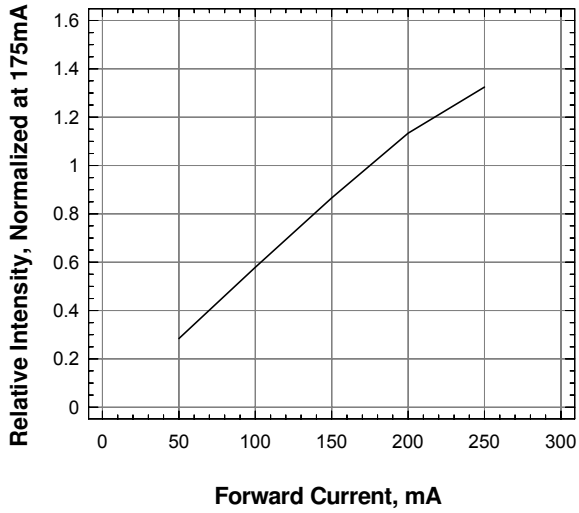


**Forward Voltage Vs Forward Current**

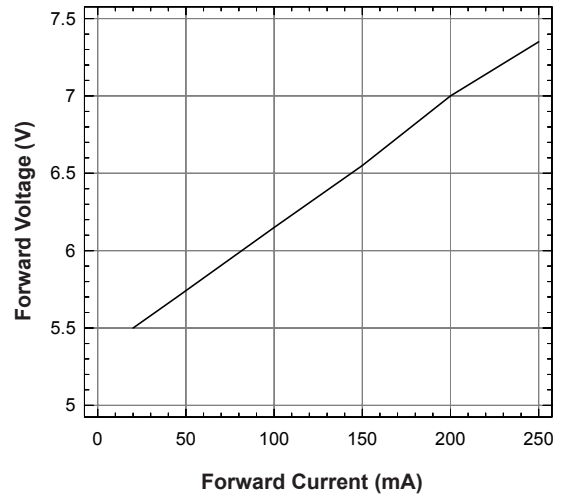


**Relative Intensity Vs Wavelength**

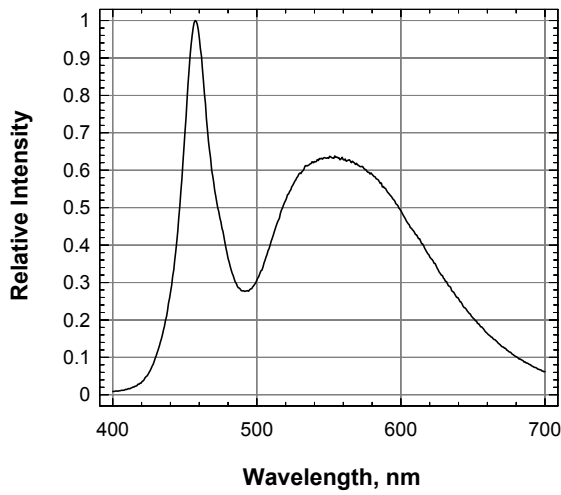


**Forward Current Vs Ambient Temperature**

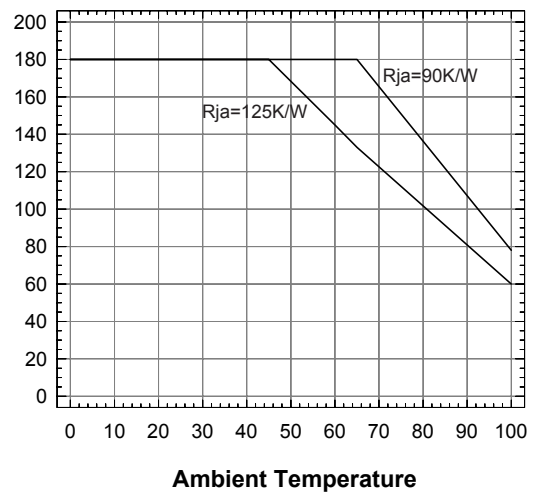

**Radiation Pattern**

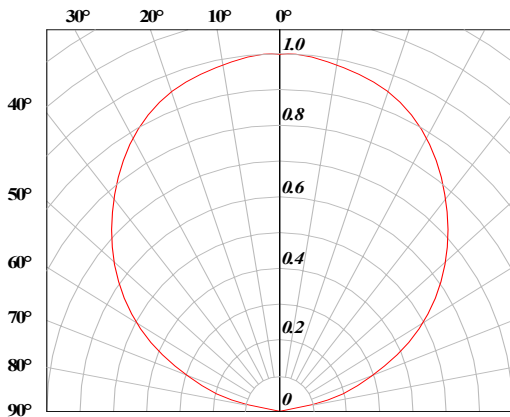

**Primax • 175 InGaN White: MBWW-FSC Package Outlines**

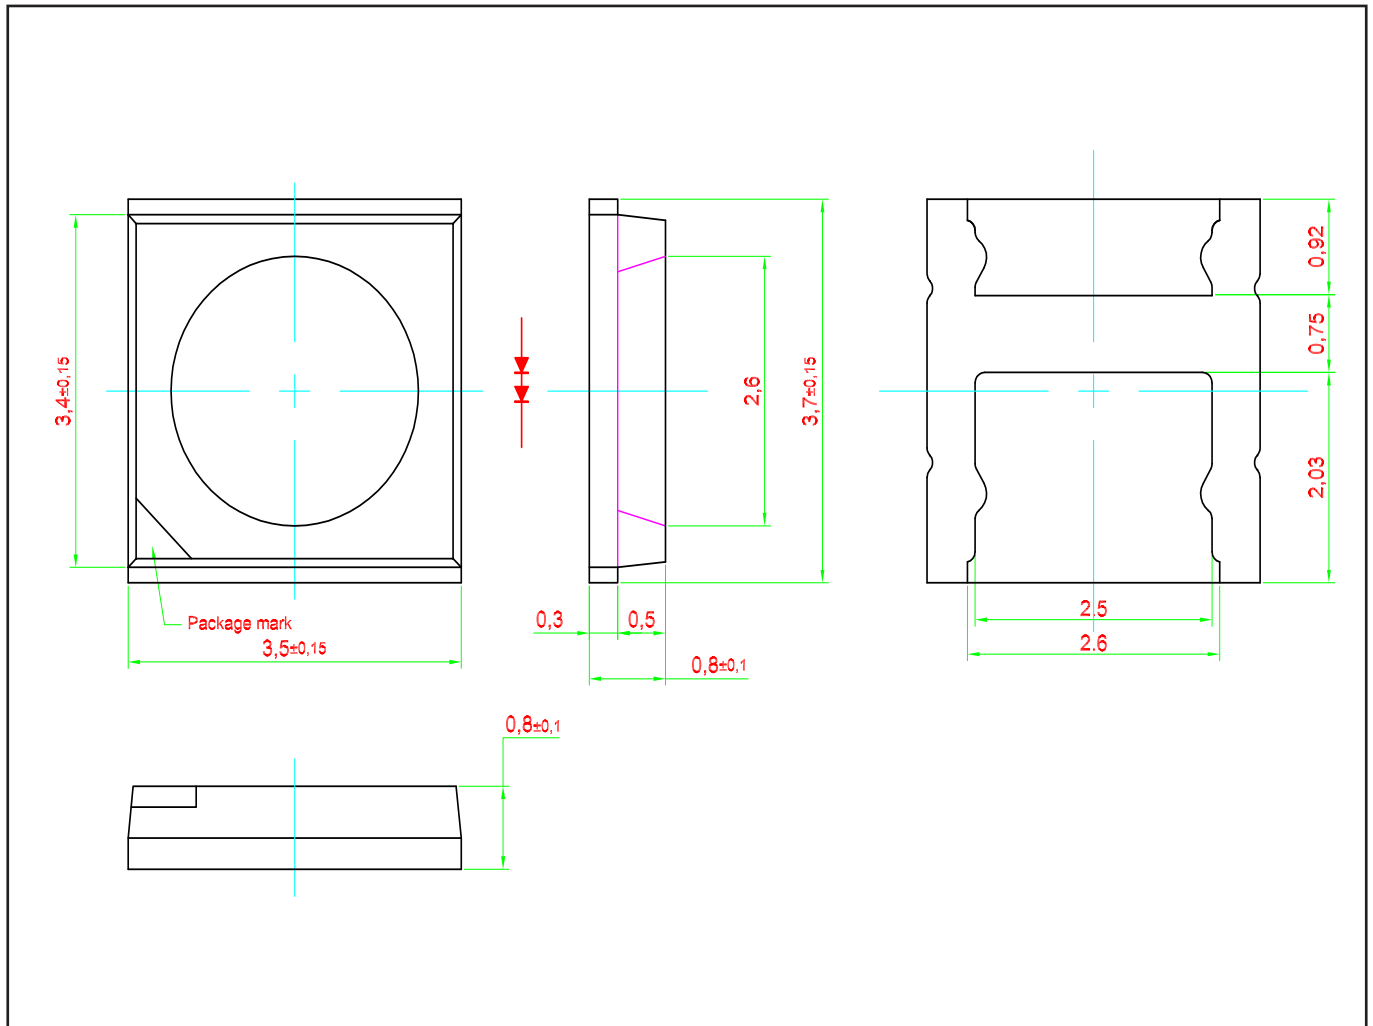


**Material**

Material	
Lead-frame	Cu Alloy With Ag Plating
Package	High Temperature Resistant Plastic
Encapsulant	Silicone Resin
Soldering Leads	Ag Plating

Note: This product is Pb free




**Recommended Solder Pad**

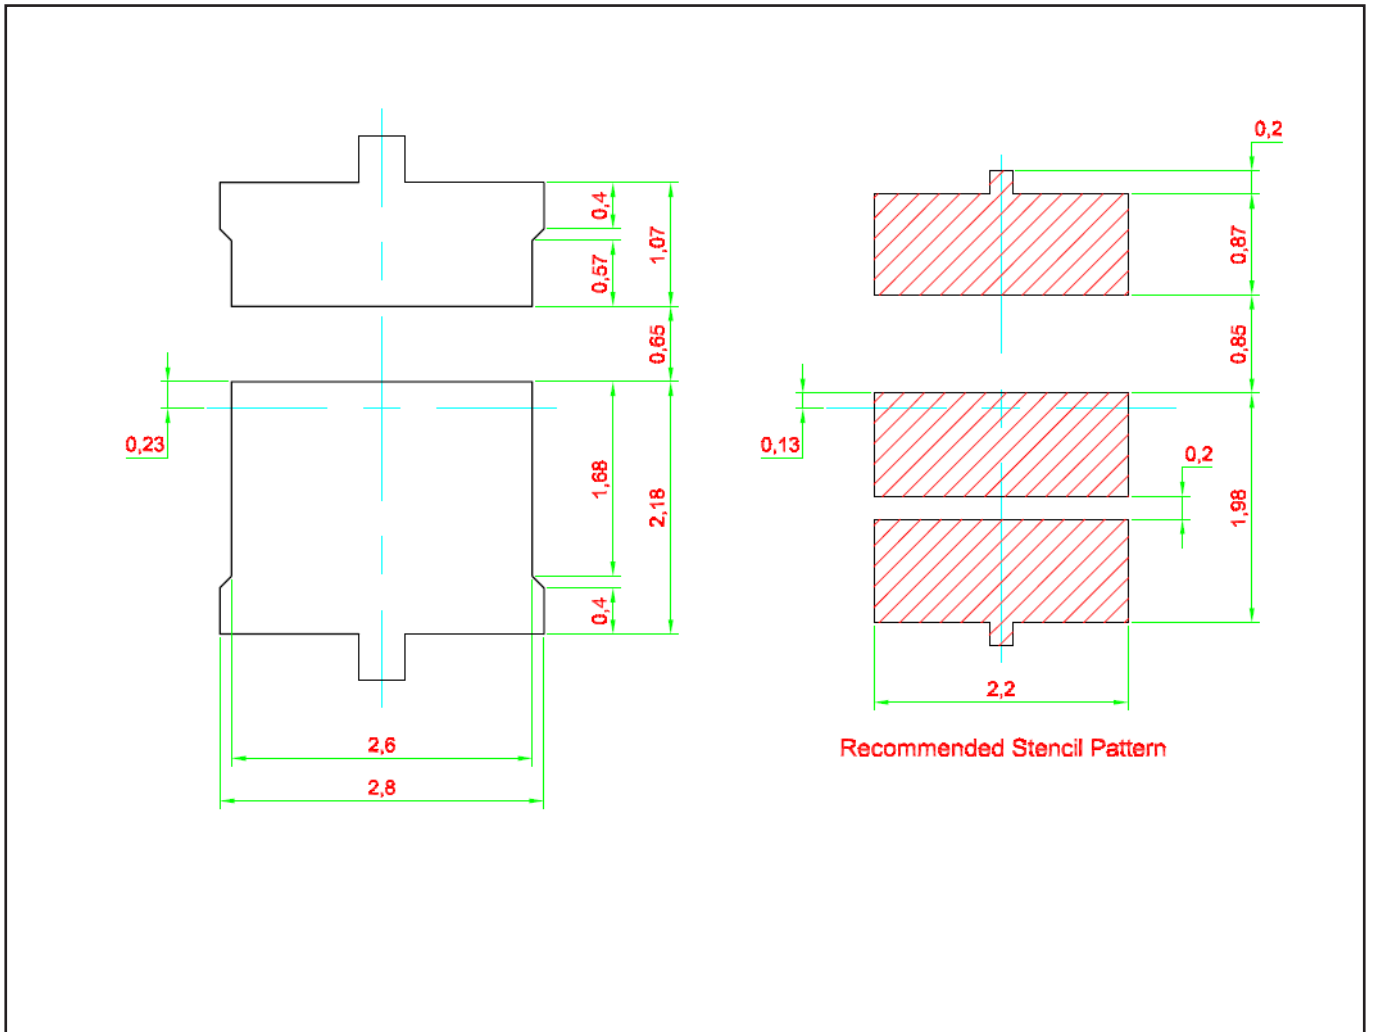


### Taping and orientation


- Reels come in quantity of 1000 units.
- Reel diameter is 180 mm.

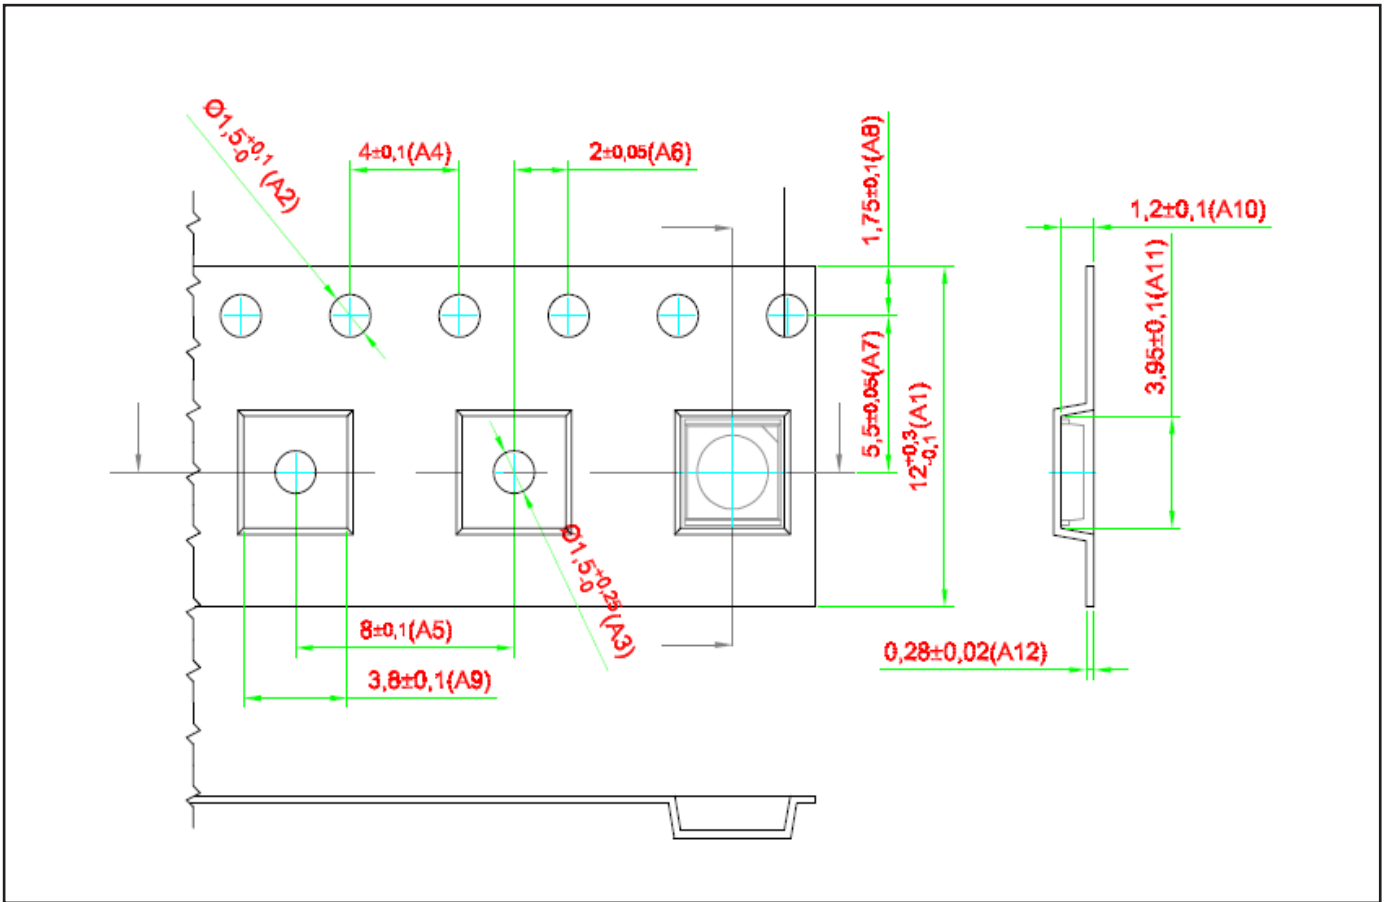


**Packaging Specification**

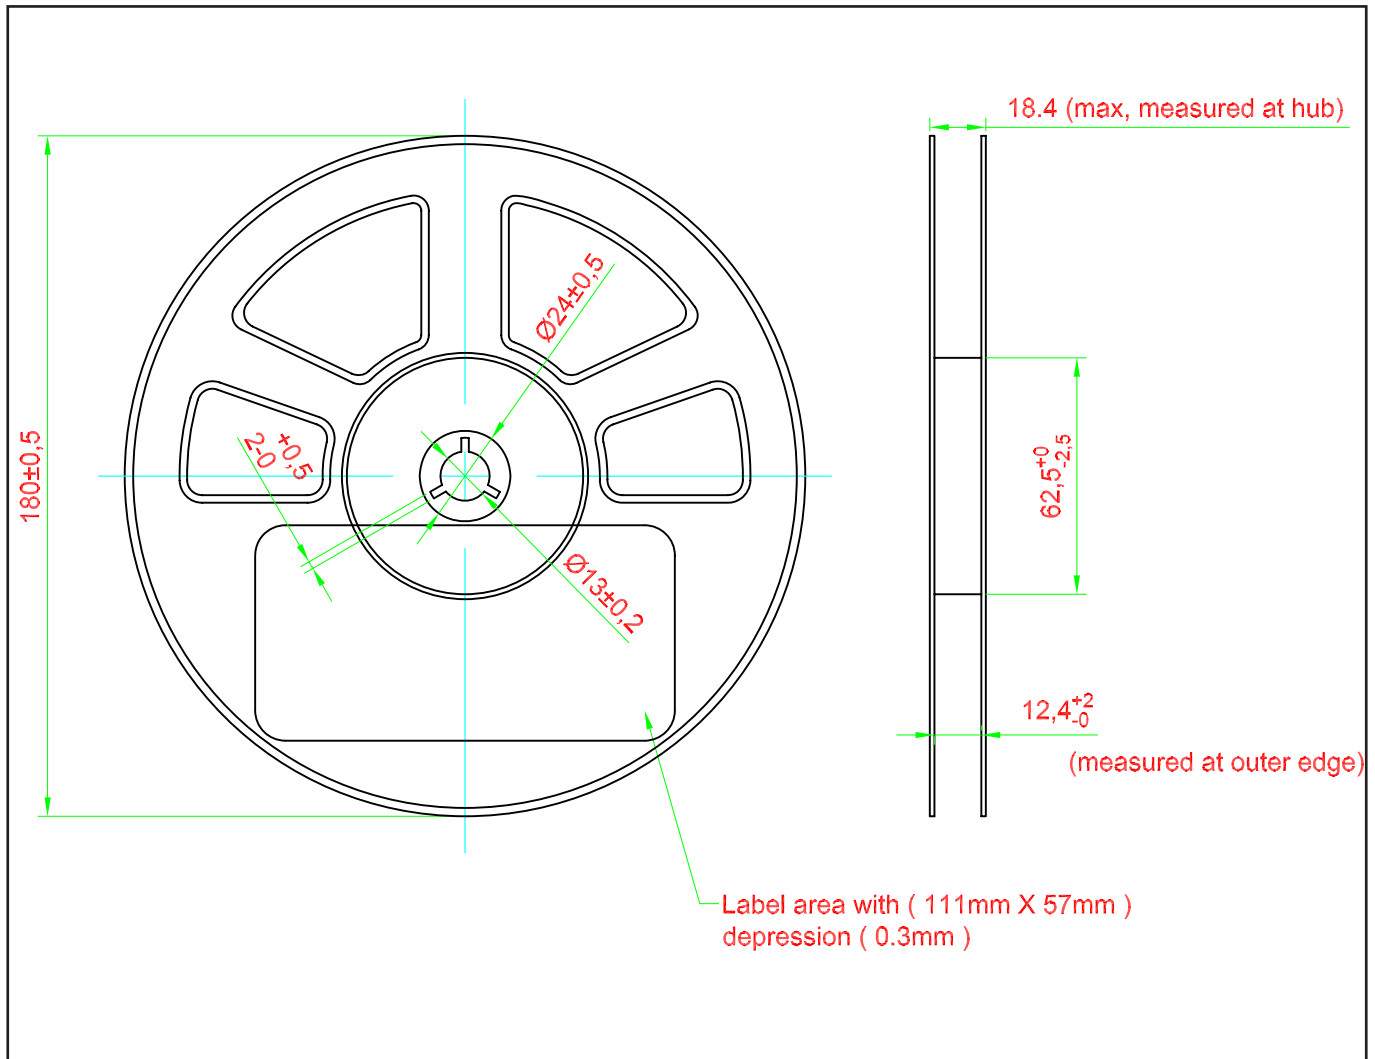

**Packaging Specification**

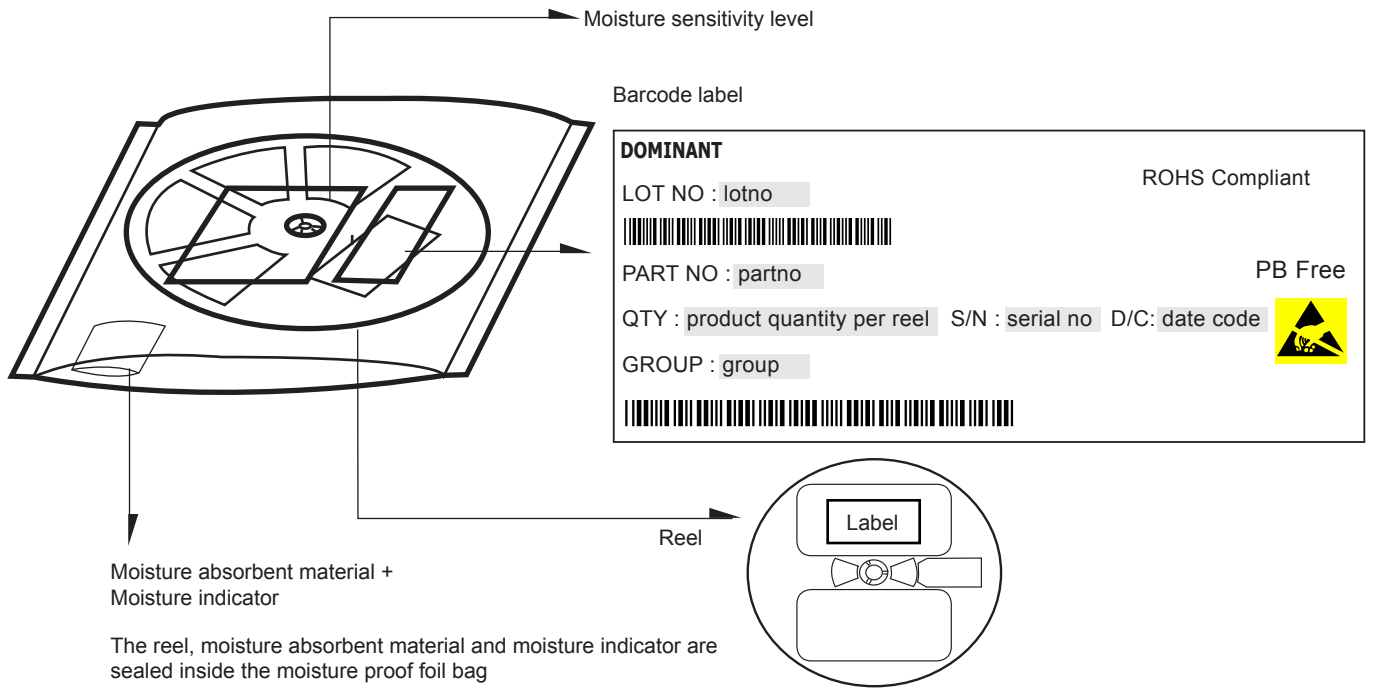


	Average 1pc Primax	1 completed bag (1000pcs)
Weight (gram)	0.041	160 ± 10

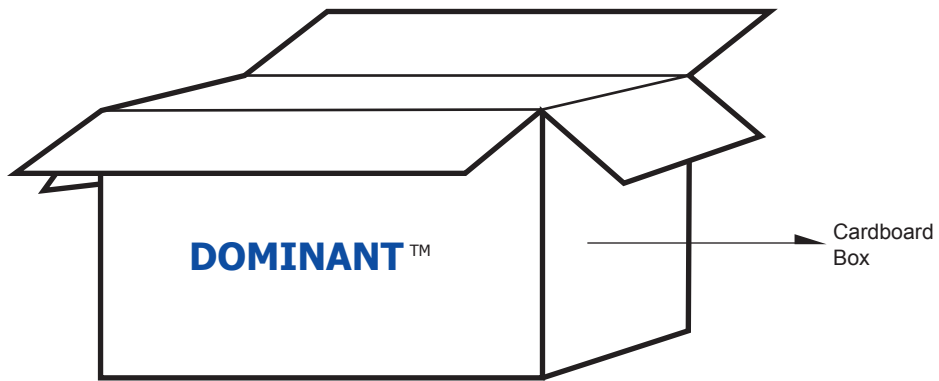

**For Primax**

Cardboard Box Size	Dimensions (mm)	Empty Box Weight (kg)	Reel / Box	Quantity / Box (pcs)
Small	300 x 250 x 250	0.58	15 reels MAX	15,000 MAX
Large	416 x 516 x 476	1.74	96 reels MAX	96,000 MAX

**Recommended Pb-free Soldering Profile**

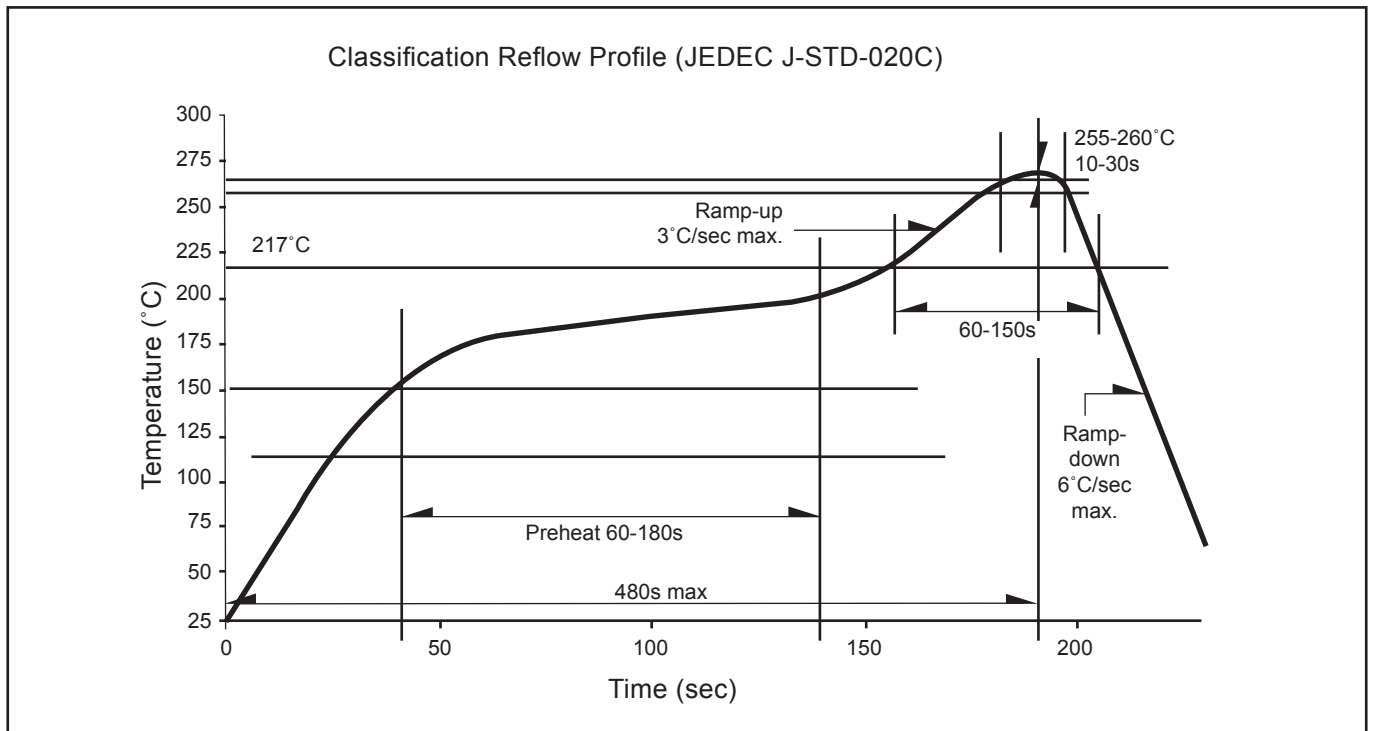

**Revision History**

Page	Subjects	Date of Modification
-	Initial Release	31 May 2013
2, 3	Add Thermal Resistance Add Characteristic	23 Jul 2013
10	Update Carrier Tape	14 Nov 2013

**NOTE**

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

## About Us

DOMINANT Opto Technologies is a dynamic Malaysian Corporation that is among the world's leading SMT LED Manufacturers. An excellence – driven organization, it offers a comprehensive product range for diverse industries and applications. Featuring an internationally certified quality assurance acclaim, DOMINANT's extra bright LEDs are perfectly suited for various lighting applications in the automotive, consumer and communications as well as industrial sectors. With extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing, research and testing capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies can be found on the Internet at <http://www.dominant-semi.com>.

### **Please contact us for more information:**

DOMINANT Opto Technologies Sdn. Bhd  
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia.  
Tel: +606 283 3566 Fax: +606 283 0566  
E-mail: [sales@dominant-semi.com](mailto:sales@dominant-semi.com)

